


HomeSeer Control of Z-Wave Locksets



LAN

HomeSeer System
v2.3.0.112 or higher




USE
Z-Troller
or
Z-Stick

USB

HomeSeer
Z-Troller™
v1.15



Z-Wave "Beaming-Compatible" Device
includes most GE/ Jasco devices

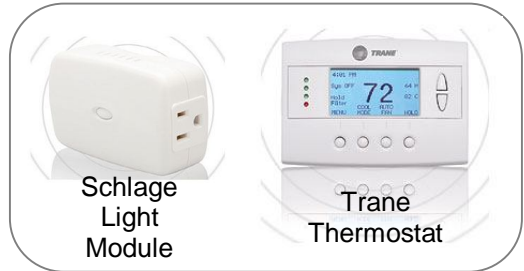

Kwikset
Z-Wave
Lockset



Schlage
Z-Wave
Lockset

Any HomeSeer system may be configured to control a Z-Wave lockset without the need for a special "bridge" unit. To do so, first, update the HomeSeer system to v2.3.0.112 (or higher). Then, install a HomeSeer Z-Troller™ or Aeon Labs Z-Stick™ Z-Wave PC interface (or other interface, based on the Zensys 5.02 firmware library). If the interface is not in direct Z-Wave range of the lockset, install a 'beaming-compatible' Z-Wave device within range of the lockset.